


# DYNAPAC SOIL COMPACTORS

Dynapac CA1300, CA1400, CA1500,  
CA2500, CA2800, CA3500, CA3600, CA4000,  
CA4600, CA5000, CA5500, CA6000, CA6500



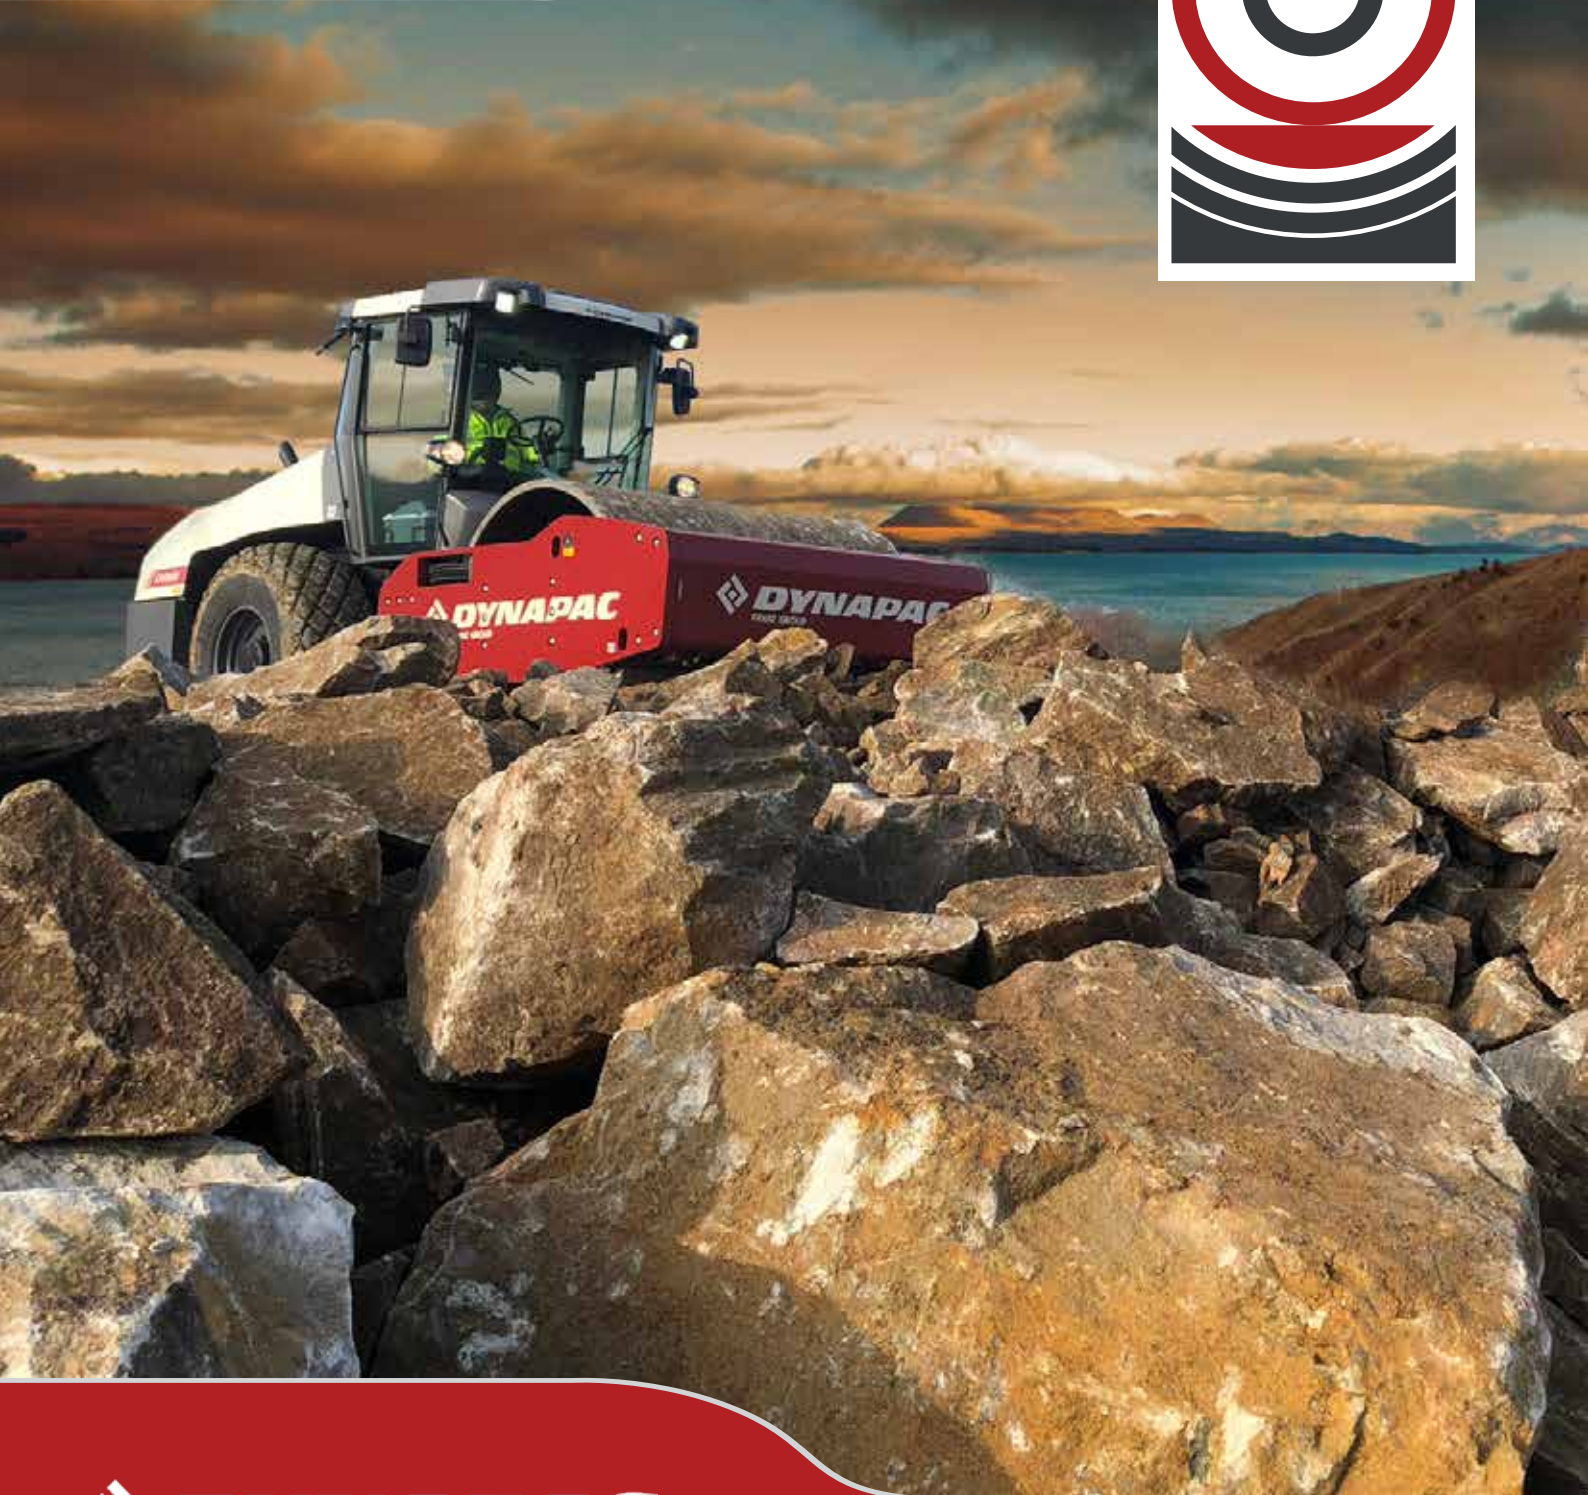

# DYNAPAC

FAYAT GROUP

There is much more to soil compaction than the roller. When we developed this generation, we applied our unmatched know-how in the field of soil compaction to the entire compaction mission. This ranges from planning the task, through the rolling phase, to analyzing the results once the job is complete.

## PRESENTING THE COMPLETE DYNAPAC SOIL COMPACTOR RANGE

These machines and their variants, are the fifth generation of Dynapac CA single drum vibratory rollers. With their state-of-the-art designs and unique features, they represent yet another example of Dynapac's innovative thinking.



### OPTIMIZED PARAMETERS

Provide superior compaction performance.



### LOW NOISE AND LOW FUEL CONSUMPTION

Sustainability and working environment in focus.



### ACTIVE BOUNCING CONTROL

Prevents misuse to the machine and over-compaction.



### MISSION CONTROL

Puts you in full control of the entire compaction process.



### CROSS-MOUNTED ENGINE

A revolution in serviceability.






# SMALL



DYNAPAC CA1300, CA1400, CA1500

The small Dynapac soil compactors are vibratory rollers designed for compaction operations in pipe trenches, compacting roads, streets and parking lots. Due to the small size and exceptional maneuverability, these rollers are also well suited for compaction on large building foundations and industrial construction sites and in cramped spaces in connection with refilling work. The rollers are also suitable for repair work and gives good maneuverability even on very steep slopes. All types of supporting and reinforcement courses can be compacted.

The PD version, equipped with pads and drum drive, is especially suitable for the compaction of silt and clayey soils.

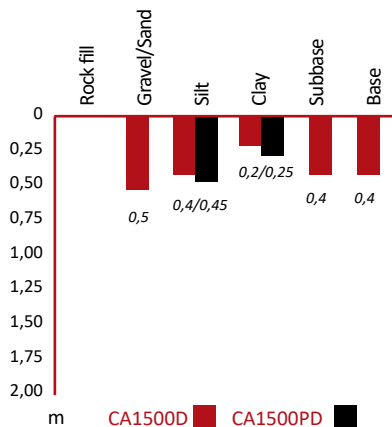

# MEDIUM




DYNAPAC CA2500; CA2800, CA3500, CA3600; CA4000, CA4600

The Dynapac CA2500 - CA4600 are medium heavy vibratory soil compactors, typical utility machines, designed for long working days in tough applications. All types of base courses and reinforcement courses can be compacted to considerable depth.

The 35 mm thick drum shell ensures excellent resistance to wear - even in compaction operations on rockfill.

The padfoot version has it's major range of application on cohesive material and disintegrated rock. All types of base courses and sub-base courses can be compacted.

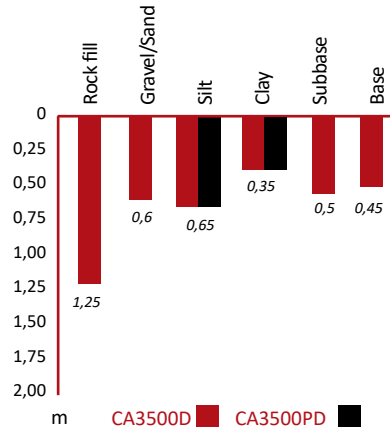

<b>Operating mass</b>	<b>5000 - 7000 Kg (11,000 - 15,500 lbs)</b>
<b>Static linear load</b>	<b>13 - 20 kg/cm (73 - 115 pli)</b>
<b>Drum width</b>	<b>1370 - 1676 mm (54 - 66 in)</b>

<b>Operating mass</b>	<b>10 000 - 15 000 Kg (22,000 - 33,000 lbs)</b>
<b>Static linear load</b>	<b>25 - 40 kg/cm (140 - 225 pli)</b>
<b>Drum width</b>	<b>2 130 mm (84 in)</b>



# LARGE

# SEISMIC




**DYNAPAC CA5000, CA5500, CA6000, CA6500**

The CA5000, CA5500, CA6000 and CA6500 are heavy rollers designed for the toughest compaction applications. Rockfill can be compacted in 2-meter thick layers, in which the size of the rocks can be up to 1 meter in diameter. The smooth drum shell thickness is 43 (CA5000) and 48 mm (CA 5500, 6000 and CA6500), which gives a long productive lifetime for compaction of rockfill, gravel and sand. Pad-foot drum is available for compaction of silt and clay materials. These rollers are a great investment for the bigger projects as compaction performance and capacity are outstanding.



**THE BEAT OF A DIFFERENT DRUM**

Why waste valuable energy by letting the drum hit the soil randomly? For many years, the soil and the drum were considered to be two separate systems. Thanks to Dynapac's engineering team, they were able to recognize that the soil and drum actually work together as one system. This finding opened the door for the development of the Dynapac Seismic system. All drum and soil combinations have their own unique natural frequencies. Dynapac Seismic automatically detects the frequency of the soil characteristics, works together with it, and applies the correct amount of energy exactly when required.

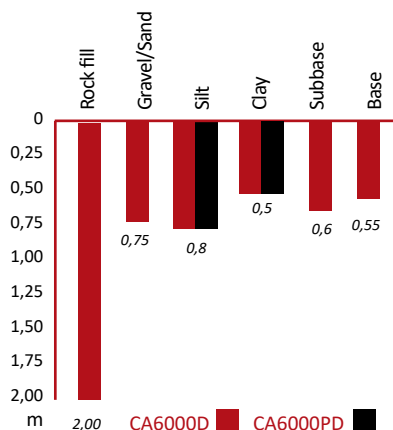

## DYNAPAC SEISMIC DOES IT DIFFERENTLY

Conventional vibratory compactors deliver a rapid succession of impacts to the soil surface at a frequency that is either pre-set at a high or low amplitude or at a frequency that is adjusted manually.

Dynapac Seismic does it differently. Since the drum and the soil act as one dynamic system, several benefits can be found from the system's natural frequency. At the natural frequency, the drum amplitude is enhanced significantly, since energy is automatically fed to the system at exactly the right time. This, in turn, maximizes the contact force between the drum and the ground, yielding maximized compaction and energy efficiency.

The best compaction parameters guarantee an optimal output. A machine that can determine soil characteristics and then automatically interact with them, will make the world of difference in compaction results. Let the machine feel the soil and cooperate with it.

<b>Operating mass</b>	<b>16 000 - 21 000 Kg (35,000 - 46,500 lbs)</b>
<b>Static linear load</b>	<b>50 - 65 kg/cm (280 - 365 pli)</b>
<b>Drum width</b>	<b>2 130 mm (84 in)</b>

## PREPARATION - COMBASE SOFTWARE

CompBase is the only recommendation tool in the industry that can provide detailed compaction data and capacity information based on full-scale tests. The machine and method selection is based on the material to be compacted and provides information on the expected depth effect and degree of compaction after any given number of passes. In addition to this; CompBase recommends suitable amplitude and rolling speed for optimum performance.

## PERFORMANCE - DYNAPAC COMPACTION OPTIMIZER (CA3500/4000/5000/6000)

We all know that the whole idea with compaction is to reach the correct set of parameters for the type of work in question. There is no point in overdoing anything – it only costs time and fuel, without improving the final result. Dynapac Compaction Optimizer, DCO, is an innovative system based on the well-proven compaction meter. The stiffness of the ground constitutes the input value for the setting of amplitude of the vibratory drum. The operator gets full control and the project benefits from this in every respect.

**Soft ground**

When the adjustable weight (2) is rotated so that it goes to the position shown in the picture above there is an amplitude of 100%.

Amplitude (%)

Parameter	Value
Amplitude (mm)	2
Fuel consumption (%)	100

All the dynamic energy from the drum can be absorbed by the ground.

**Hard ground**

When the adjustable weight (2) is rotated so that it is in the position shown in the picture above there is an amplitude of 50%.

Amplitude (%)

Parameter	Value
Amplitude (mm)	1
Fuel consumption (%)	90

The drum readjusts so that less dynamic energy is supplied to the ground from the drum.

**Final compaction**

When the adjustable weight (2) is rotated so that it is in the position shown, there's a minimum amplitude so that the forces almost balance each other out.

Amplitude (%)

Parameter	Value
Amplitude (mm)	0
Fuel consumption (%)	0

The drum is reset so that there is only a very small amount of dynamic energy supplied to the ground.

## PROTOCOL - DYN@LYZER FOR SOIL WITH GNSS

In all projects it is vital to do the right thing - and to do things right. Also in compaction, solid documentation is worth a lot more than spot checks and guesswork. Dyna@Lyzer, includes a field computer which is fed continuously with measurement data – not just random checks. The operator reads the results in real-time and can easily reach top performance from the beginning. The Dyna@Lyzer is a unique Dynapac feature that improves the result of every job. A real profit maker. The results of the compaction are shown directly on the screen of the portable Dyna@Lyzer unit. The measurement values can easily be transferred to a desktop computer.

# PLANNING FOR EFFICIENCY AND ECONOMY

## MAP GROUND CONDITION

Map the ground condition and the material to be compacted. If your CA roller is equipped with a Compaction Meter with Dyna@Lyzer (with GNSS), you can run the machine over the area in advance. This will give you a chart showing ground condition and material to be compacted, at the same time revealing weak areas before you start rolling.

## SELECT MACHINE AND COMPACTION STRATEGY

Dynapac CompBase software bases the selection of machine and method on the material to be compacted. The software provides information on the expected depth effect and degree of compaction after any given number of passes. CompBase also recommends suitable amplitude settings and rolling speed for optimum performance. This saves fuel and reduces environmental impact.



### TOOL: DYNAPAC COMPBASE SOFTWARE

- MAP GROUND CONDITION, MATERIAL & COMPACTION SPECIFICATIONS
- SELECT MACHINE & COMPACTION STRATEGY
- CALCULATE COMPACTION ACHIEVEMENT
- OPTIMIZE YOUR PRODUCTIVITY

## FEEDBACK ON PROGRESS AND POSITION

Your fifth generation Dynapac CA soil compactor is warmed up and ready to roll. Start compacting and the Dynapac CA roller, with Compaction Meter and Dyna@Lyzer, gives you continuous information on the increase in compaction and reveals weak areas. Compaction results are displayed on the computer screen, allowing you to focus the compaction energy on the ground surfaces that need additional compaction. The screen also displays the position of the roller in relation to a selected reference line for the section, so you always know precisely where you are.

## SUPERIOR COMPACTION PERFORMANCE

The new CA rollers have static linear loads in steps of 5 kg/cm. This, combined with an optimum high amplitude, enables you to compact rockfill down to 1.65 meter with a Dynapac CA4000D. The better depth

effect means higher volume capacity and less passes to reach compaction specifications, thus saving fuel and reducing cost. Environmental impact is also lower. If the roller is equipped with the Dynapac "Silent Weights" eccentric concept, this enhances compaction performance even further.

## ACTIVE BOUNCING CONTROL (ABC)

This feature on the new CA generation prevents damage and prolongs the lifetime of the roller by eliminating drum double jump, or over-compaction – an action that can destroy components in the machine. ABC is standard in Dynapac Compaction Meters.

With ABC the machine never will work in bouncing and second-hand value will be secured.



**Tools: A fifth generation Dynapac CA soil compactor, equipped with Compaction Optimizer, incorporating Compaction Meter and Dyna@Lyzer with GNSS (optional).**

- STATIC LINEAR LOADS 13 - 80 KG/CM
- AMPLITUDE UP TO 2,1 MM
- ERGONOMICALLY DESIGNED CAB
- CONTINUOUS OPERATOR FEEDBACK
- ADVANCED SAFETY FUNCTIONS
- LOW FUEL CONSUMPTION AND ENVIRONMENTAL IMPACT



## THE MACHINE TAKES THE STRAIN

The ergonomically designed, air-conditioned cabs on the new generation offer a high level of operator comfort and good visibility over the work area and surroundings. The noise level from the engine is very low. A feature unique to Dynapac CA rollers is a spin-around seat, steering module and display cluster, which allows movement of up to 180 degrees without stress to the neck or body.

## SAFETY FIRST

Safety functions include Electronic Drive Control with a “quick brake” function, which shortens braking distances if the lever is moved very fast, and a tilt indicator. Loss of traction, even in the toughest conditions, is swiftly counteracted by an easy-to-use toggling gear shifting system, or with an anti-spin system.

## LOWER FUEL CONSUMPTION AND ENVIRONMENTAL IMPACT

The engines can have the Dynapac EcoMode fuel saving system that minimizes fuel consumption and CO<sub>2</sub> emissions by ensuring that the roller does not consume more power than needed at any time. This, together with higher compaction parameters and other improvements, has resulted in a drastic reduction in fuel consumption compared to the previous generation.

## BEST POSSIBLE OVERALL ECONOMY

With Dynapac performance, you can achieve first-rate compaction results with maximum uniformity in terms of the bearing strength of each layer, with the best possible overall economy, i.e., lower cost per compacted cubic meter. Mission target reached!



## BIG FUEL SAVINGS WITH ECO!

Dynapac is proud to announce that we have fulfilled our promise to offer customers soil and asphalt rollers with very low fuel consumption. The secret is our EcoMode.

We closely monitored the fuel consumption of the new Dynapac soil compactor range. As a result, we can now confirm that in EcoMode, all the rollers consume 15–20% less diesel fuel than our previous range without EcoMode.

When using the Eco-system the percentile saving is higher during compaction than during idling and transportation. Combine the 15-20% fuel savings with biodegradable hydraulic oil and very low noise levels and the result are “green” rollers.

Customers who choose the traction/performance package „Anti-spin & ECO“ will have EcoMode included. EcoMode always comes with adjustable vibration frequency and a frequency meter. For Stage IV/T4f engines also Traction Control is with EcoMode.



1

**PERFORMANCE**

Easy accessible scrapers divided to follow drum movement and replacement at low cost.

2

**PERFORMANCE/DURABILITY**

Thick drum shell ensures compaction performance and long running time before change.

3

**STATIC LINEAR LOAD**

in steps of 5 kg/cm means there's a machine for all needs.

4

**COMPACTION PERFORMANCE**

Several compaction data settings to choose among. SEISMIC is standard for CA1500 - 6500

5

**LIGHTS**

Night or day? Choose working/driving lights according to your needs. Always LED technology

6

**OPERATOR'S STATION**

Three main configurations to choose from, and numerous options. DCM/ABC is standard for CA1500 - 6500



7

**PERFORMANCE**

Clean inlet air (combustion and cooling) taken in as high as possible.

8

**GRADEABILITY/PERFORMANCE**

Heavy duty rear axle with failsafe brakes.

9

**SERVICEABILITY**

Cross-mounted engine gives unique service access

10

**SAFETY**

Sloping engine hood and 1x1 meter view front & rear.

11

**ENGINES FROM CUMMINS OR DEUTZ**

4 or 6 cylinders, Stage IIIA (Tier3) and up, at your choice. Always following the latest emission steps.

## CA2500/3500 High Climb



### CA2500/3500 High Climb

To make it possible to achieve higher gradeability reverse we have built the High Climb machines on our Anti-spin versions with NoSpin rear axles and by introducing new heavier components in rear axle, drive motor and transmission the drum is able to push the machine reverse 55% (28 degrees).

PD machines and D machines with pad shell will have a perfect grip in the soil but remember that smooth Drums need to have grip to push the machine reverse. A visible change in the drum will be the mechanical stops (circled) on drive side not to overload the rubber elements. A visible change in display will be that not only the tilt indicator but also the gradeability indicator will be visible as default (circled). In the top of the engine hood there will be HC logos to indicate the machine type.



# DYN@LYZER - DOCUMENTING TO ASSURE QUALITY



## DYNAPAC'S DOCUMENTATION SYSTEM

Using the built-in Compaction Meter with Dyna@Lyzer with GNSS, each stage of the compaction work is documented and all measured values can be stored. The analysis function enables the compaction work to be replayed.

## MACHINE USE - LEVEL OF EFFICIENCY

It enables the complete project to be studied in the office after the task is completed to see how many runs have been allocated over the surface and the level of compaction achieved. It thus provides the opportunity to assess if the roller has been used efficiently.

## ELIMINATING WEAK SPOTS

Studying the results reveals any areas that may not have reached compaction due to "hidden" weak spots and measures can be taken to remedy this before construction work is carried out on top.

## QUALITY ASSURANCE / ACCEPTANCE INSPECTION

High quality documentation is generated for quality assurance and as an indication for acceptance inspection. The results from the acceptance inspection can be entered in the Dyna@Lyzer so that the results from quality control can be collected together in one protocol.

Tools: PC and data from fifth generation Dynapac CA soil compactors equipped with Dynapac Documentation System.

HAS THE SOIL COMPACTOR BEEN USED EFFICIENTLY?

LOCATING POSSIBLE WEAK SPOTS

PRODUCTIVITY OPTIMIZATION

QUALITY CONTROL

DATA FOR ACCEPTANCE INSPECTION

**CROSS-MOUNTED ENGINE:**

EXCELLENT SERVICEABILITY  
VERY LOW NOISE LEVEL  
CLEAN INLET AIR  
OPTIMAL WEIGHT DISTRIBUTION  
EASE OF TRANSPORTATION  
1 x 1 VIEW



## **A WORLD FIRST, WITH UNIQUE ADVANTAGES**

### **ENGINES WITH LATEST EMISSION STAGES**

The new soil vibratory rollers are the first of their type with cross-mounted engines at the rear – and this provides excellent serviceability. They can be equipped with the latest engine emission stages.

### **VERY LOW NOISE LEVEL**

The noise level is very low, since the cooling air intake is placed at the top of the hood with the outlet down the sides, combined with the ejector exhaust outlet.

### **CLEAN INLET AIR**

The position of the combustion air intake also has the advantage of keeping the inlet air as clean as possible, an important factor in the dusty environments in which these rollers operate.

### **OPTIMAL WEIGHT DISTRIBUTION AND EASE OF TRANSPORTATION**

The cross-mounted engine also gives both optimal weight distribution and ease of transportation as it keeps down machine length. The low profile of the hood gives a 1 x 1 meter view to the rear.

### **THICK DRUM SHELL**

Ensures a long running time before a drum change is required.

### **DIVIDED SCRAPER BLADE**

Keeps drum free of material during operation and can be replaced quickly and at low cost.



### **SERVICE LEVEL ALERT**

A service interval alert in the instrumentation display for comfort cabs indicates when service is required and what action to take.

### **EXCELLENT ACCESS TO ENGINE**

The cross-mounted engine at the rear offers excellent access for all service and maintenance needs. The engine hood is easy to open for quick maintenance and the hydraulic pumps are in line with the engine and fully accessible for service.

### **SUSTAINABILITY PACKAGE**

The CA rollers can be equipped with a Sustainability Package featuring an rpm management system, biodegradable fill-for-life hydraulic fluid, 50 hours service kit, electrical engine block heater and working lights with LED lamps.

### **CONTROLLING LIFE-CYCLE COSTS**

Dynapac's CostCtrl software on the web and service contracts, including extended warranty, enable you to gain full control over life-cycle costs and maximize machine availability.

### **WHEN YOU NEED US, WE'RE THERE**

Dynapac's international service network offers full support and assistance with all parts and service needs.

### **SERVICE**

[SERVICE LEVEL INDICATOR](#)

[EXCELLENT ACCESS TO ENGINE/COMPONENTS](#)

[SUSTAINABILITY PACKAGE](#)

[CONTROL OVER LIFE-CYCLE COSTS](#)

[INTERNATIONAL SERVICE NETWORK](#)

[Dyn@Link](mailto:Dyn@Link)

1. MACHINE TYPES ▶

Smooth drums (D)  
All weather tyres



Compaction Optimizers (DCO)  
All weather tyres



Pad foot drums (PD)  
Tractor tyres



2. ENGINES ▶

IIIA/T3  
IV/T4final  
V/T4final



3. TRACTION SYSTEMS ▶

**HighClimb/ECO:**  
NoSpin rear axle  
EcoMode  
Frequency meter  
Speed limiter  
Tilt Indicator  
Gradeability Indicator  
**Separate choices:**  
Tyres

**Antispin/ECO:**  
NoSpin rear axle  
EcoMode  
Frequency meter  
Speed limiter  
Tilt Indicator  
**Separate choices:**  
Gradeability Indicator  
Tyres

**Traction Control  
or Traction Control/ECO  
(Stage IV/T4f & V/T4f)**  
No Spin rear axle or  
Limited slip rear axle  
Speed limiter  
Tilt Indicator  
EcoMode  
(Frequency meter)  
**Separate choices:**  
Gradeability Indicator  
Tyres

**Dual Speed**  
Dual speed  
Limited slip rear axle  
**Separate choices:**  
Tyres





## 4. OPERATOR'S PLATFORM

### Cab

- AC (some models)
- Back-up alarm
- CE: Yes
- Charger socket: One 24V
- Floor mat: Standard 5 mm
- Panels: Back cover
- Heating: 6 nozzles
- Hooks: One
- Inner roof: Noise absorbing
- Interior light: Door
- Internal rear view mirror: CE-marked
- Operator's seat, suspension
- Operator's station, rotating
- Rear view mirrors, traffic
- Rotating beacon std.
- Seat belt 3" with buzzer
- Steering wheel: Adjustable
- Storage: In back cover
- Sun protection: Front screen print
- Windows: Tinted
- Wipers: Front/rear
- Working lights, LED

### ROPS / FOPS

- Floor mat: Standard 5 mm
- Panels: Back cover
- Charger socket: One 24V
- Steering wheel: Adjustable
- Storage: In back cover
- CE: Yes
- Operator's station, fixed or rotating (some models)
- Operator's seat, suspension
- Seat belt 3" with buzzer
- Working lights LED
- Rotating beacon std.
- Rear view mirrors, traffic
- Vandal cover
- Back-up alarm

### Comfort Cab

#### CAB FEATURES PLUS :

- ACC
- Charger socket: One 24V, One 12V
- Cooling box
- Entry light on footsteps/ladder/battery cabinet
- Floor mat: Thick Noise absorbing 20 mm
- FM/AM radio with MP3/USB and Bluetooth
- Foot rest
- Heating: 8 nozzles with floor heating
- Hooks: Two
- Interior light: Door w. timer, reading, night light
- Ipod/MP3 holder
- Operator's seat, comfort
- Panels: Covering most steel plates
- Rotating beacon dual LED
- Service interval /daily check in display
- Storage: Back cover, side panel, back upper shelf
- Sun protection: Front screen print, sun visor front, sun curtain back
- Wipers: Front/rear + Interval front
- Working lights LED



## 6. OPTIONS

- 50 hours Service kit & tool box
- Bolt-on padfoot shell (CA1300D-CA5000D)
- Certificate, SBF 127 (Swedish)
- Compaction Meter with ABC
- Dyn@Lyzer, preparation
- Dyn@Lyzer, complete installation
- Decal, risk location
- Emergency stop, dual external
- Engine block heater (120V or 240V)
- Environmental Certificate (Swedish)
- Fire extinguisher
- First aid box
- Fuel tank drainage
- GNSS for Dyn@Lyzer
- Gradeability indicator
- Hearing protector
- Heater, socket (240V) for Cabs
- Hydraulic fluid, bio
- Lights, licence plate
- Lights, reversing, LED
- Scrapers, fixed steel, smooth
- Scrapers, flexible, smooth
- Scrapers, fixed steel, pads
- Scrapers, heavy duty, pads
- Sign, Slow Moving Vehicle
- Special Colour, one colour
- Special Colour, two colours
- Tachograph
- Tachograph, preparation
- Tool box
- Tool set
- Field kit, Bolt-on padfoot shell (CA1300D-CA5000D)
- Field kit, Drum conversion, D to PD (CA5500-CA6500)



## ***COST CONTROL THAT SAVES BIG***

Being active in the Road Construction business requires considerable investment. Every square meter involves an operational cost composed of fixed costs such as interest on equipment acquired, labor costs, insurance and equipment depreciation, but also variable costs such as expenses for fuel, wear and maintenance.



### **Wear cost**

Since Dynapac always uses high-quality wear parts, the time that is needed to change them can be kept to a minimum. Customers who use Dynapac spare parts will improve reliability and protect their investment.

### **Operator cost**

The operator is always a very big part of the total cost. Operators using Dynapac equipment will enjoy good ergonomics and easy-to-operate equipment.

### **Maintenance cost**

All road construction equipment need regular check-ups such as change of oils and filters. Dynapac always strives to use components that require as little maintenance as possible.

### **Investment cost**

The purchase price is often only a relatively small part of the total cost. Dynapac rollers and pavers maintain a high value throughout their working life, which is good to know if you ever want to sell it.

### **Fuel cost**

Fuel expenses can make up a large part of your total cost. Since Dynapac rollers and pavers are equipped with a very efficient hydraulic system, your fuel cost can be kept at a low level.

## SERVICE COMMITTED TO YOUR FUTURE

### WHAT?

#### GENUINE PARTS AND KITS

- Preventive maintenance kits
- Genuine Filters
- Fluids and lubricants
- Wear and repair kits
- Upgrade Kits

#### SERVICE

- Right competence
- Training program
- Inspection & service program
- Extended Warranty & Service Agreement

#### CONSUMABLES

- Road Milling  
Tools (bits)

### HOW?

#### GLOBAL DISTRIBUTION NETWORK

Always close to you

#### DYNAPAC.COM

- Kit selector
- Fluid selector
- Shop Online

#### DYN@LINK

- Manage your fleet
- Timely interventions planned with service alerts

## PREVENT THE COST OF A BREAKDOWN

### REGULAR MAINTENANCE PREVENTS COSTLY STANDSTILLS.

Equipment breakdowns have a direct impact on your productivity. No production means no revenue, but the fixed costs stay the same, resulting in lower profitability. By avoiding breakdowns and increasing the reliability of your machine, you will be able to produce more per year, which will immediately improve your profitability.

## PREVENTIVE MAINTENANCE KITS

### PREVENTIVE MAINTENANCE KITS

All in one box and tailored to match your equipment. Easy to obtain and attractively priced, our preventive maintenance kits contain all the parts required for the equipment's scheduled maintenance program. When installed by one of our certified technicians, you keep equipment downtime to a minimum and its uptime to a maximum throughout its working life.

### PREVENTIVE MAINTENANCE PAYS BACK

Equipment needs preventive maintenance that demands

- Timely intervention to avoid expensive breakdowns
- High quality maintenance also means higher resale value (residual value)



**Lower Cost of Ownership**  
Maintenance prevents more costly repairs



**Increased equipment reliability**  
Full equipment uptime



**Higher resale value**

**TECHNICAL DATA DYNAPAC SOIL COMPACTOR RANGE**

	Operating mass, incl. Cab (kg)	Static linear load (kg/cm)	Drum width (mm)	Frequency / Amplitude	Diesel Engine Power, kW (stage/Tier)
CA1300D	5000 (ROPS)	13/15	1370	35 Hz / 1.7 mm	55 (V/T4)
CA1300PD	5000 (ROPS)	-	1370	35 Hz / 1.5 mm	55 (V/T4)
CA1400D	6 500 (ROPS)	20	1676	32/32 Hz / 1.7/0.8 mm	55 (V/T4)
CA1400PD	6 500 (ROPS)	-	1676	32/32 Hz / 1.6/0.8 mm	55 (V/T4)
CA1500D	7 200	21	1676	32/36 Hz* / 1.8/0.8 mm	55 (V/T4) / 82 (IIIA/T3)
CA1500PD	7 300	-	1676	32/36 Hz* / 1.8/0.8 mm	55 (V/T4) / 82 (IIIA/T3)
CA2500D (3.3)	10 200	26	2130	30/30 Hz / 1.8/0.9 mm	82 (IIIA/T3)
CA2500D	10 300	26	2130	33/34 Hz* / 1.8/0.9 mm	89 (IV/T4) / 97 (IIIA/T3)
CA2500PD	11 200	-	2130	30/30 Hz* / 2.0/1.1 mm	89 (IV/T4) / 97 (IIIA/T3)
CA2800D	12 200	36	2130	33/34 Hz / 1.8/0.9 mm	97 (IIIA/T3)
CA3500D	12 100	36	2130	31/34 Hz* / 1.9/0.9 mm	97 (IV/T4) / 97 (IIIA/T3)
CA3500PD	12 100	-	2130	30/30 Hz* / 1.8/1.0 mm	97 (IV/T4) / 97 (IIIA/T3)
CA3600D	12 500	36	2130	31/34 Hz / 1.9/0.9 mm	128 (IIIA/T3)
CA3600PD	12 500	-	2130	30/30 Hz / 1.8/1.0 mm	128 (IIIA/T3)
CA4000D	13 300	41	2130	30/30 Hz* / 2.0/0.8 mm	115 (V/T4) / 119 (IIIA/T3)
CA4000PD	13 300	-	2130	30/30 Hz* / 2.0/1.0 mm	115 (V/T4) / 119 (IIIA/T3)
CA4600D	13 700	41	2130	30/30 Hz* / 2.0/0.8 mm	149 (V/T4) / 128 (IIIA/T3)
CA4600PD	13 600	-	2130	30/30 Hz* / 2.0/1.0 mm	149 (V/T4) / 128 (IIIA/T3)
CA5000D	16 200	50	2130	29/30 Hz* / 2.1/0.8 mm	149 (V/T4) / 128 (IIIA/T3)
CA5000PD	16 500	-	2130	29/30 Hz* / 1.9/1.0 mm	149 (V/T4) / 128 (IIIA/T3)
CA5500D	18 400	55	2130	29/30 Hz* / 2.1/0.8 mm	149 (V/T4) / 128 (IIIA/T3)
CA5500PD	18 200	-	2130	29/30 Hz* / 2.1/0.8 mm	149 (V/T4) / 150 (IIIA/T3)
CA6000D	19500	60	2130	29/30 Hz* / 2.1/0.8 mm	149 (V/T4) / 150 (IIIA/T3)
CA6000PD	19 300	-	2130	29/30 Hz* / 2.1/0.8 mm	149 (V/T4) / 150 (IIIA/T3)
CA6500D	20 900	65	2130	29/30 Hz* / 2.1/0.8 mm	149 (V/T4) / 150 (IIIA/T3)
CA6500PD	20 800	-	2130	29/30 Hz* / 2.1/0.8 mm	149 (V/T4) / 150 (IIIA/T3)

**DYNAPAC COMPACTION OPTIMIZER**

CA3500DCO	12 200	36	2130	28 Hz / 0-2 mm	97 (IV/T4) / 97 (IIIA/T3)
CA4000DCO	13 400	41	2130	28 Hz / 0-2 mm	115 (V/T4) / 119 (IIIA/T3)
CA5000DCO	16 300	50	2130	28 Hz / 0-2 mm	149 (V/T4) / 128 (IIIA/T3)
CA6000DCO	19 600	60	2130	28 Hz / 0-2 mm	149 (V/T4) / 150 (IIIA/T3)

\* SEISMIC (Values for manual mode)

**Your Partner on the Road Ahead**



**Dynapac Compaction Equipment AB**  
 Industrivägen 2, 371 31 Karlskrona, Sweden  
 Phone: +46 455 30 60 00 - Fax: +46 455 30 60 30  
[www.dynapac.com](http://www.dynapac.com)